

Concord® 4 TouchScreen



OVERVIEW

The Concord 4 TouchScreen from Interlogix is a color LCD screen that complements Concord 4 security systems for additional safety and peace of mind. The easy-to-use touch screen provides system owners with at-a-glance home status information, letting them easily and conveniently control the basic functionality of their Concord 4 system.

The Concord 4 panel comes equipped to handle up to 3 touch screens. An additional 8 touch screens can be added using an optional power module, making it an ideal way to add points of control throughout the home or business.


Power to the touch screen is backed up by the panel battery in the event of power loss. A wall bracket for wall mounting is included with the touch screen and an optional table-mounting stand is available from a third-party source. Additionally, the panel is fitted with an internal speaker that emits system status “beeps,” notifying system owners of trouble and alarm conditions.

Note: The Concord 4 TouchScreen complements Concord 4 security systems version 4.5 or later. System programming cannot be completed using a Concord 4 TouchScreen alone; therefore a traditional keypad must be installed as well.

STANDARD FEATURES


- 3.5-inch color LCD screen delivers at-a-glance status of the system and property
- Notification status icons
 - Identify door/window open
 - Last motion detected
- “My Property” status icon covers
 - All non-window
 - All non-door
 - Non-interior motion changes
- Supports multi-partition control, arming and status
- At-a-glance state synchronized across multiple touch screens
- Date and time programming
- Superbus compatible via a standard 4-wire connection
- A single Concord 4 installation can support up to 11 touch screens (additional power module required for 4 or more touch screens)

Concord® 4 TouchScreen

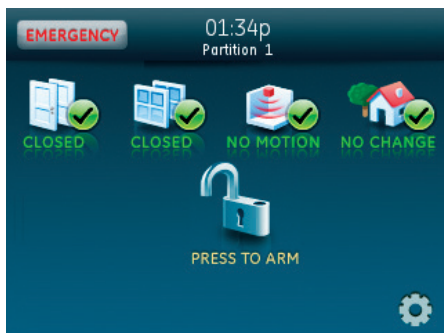


Main Screen

Quick, at-a-glance status provides a complete view of the system.

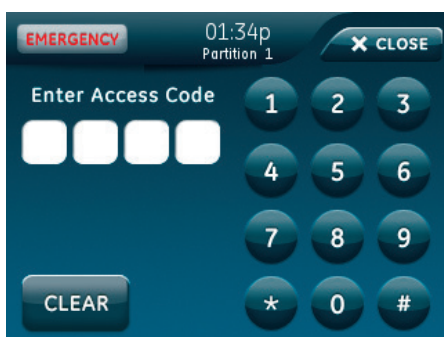

Code Entry Screen

Large keypad makes security system operation user friendly.

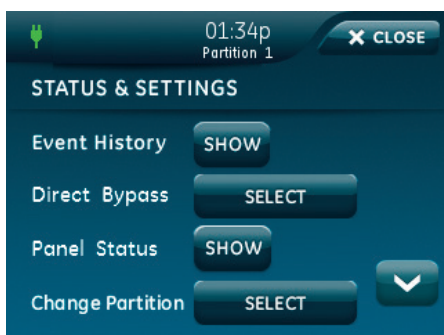

Settings

Multiple setting options allow for end user personalization of their system.



Arm Screen

One-touch arm/disarm functionality provides convenience and peace of mind.


Specifications

Compatibility	Concord 4, version 4.5 or later
Voltage	12 VDC nominal
Current	100mA typical, 250mA max alarm
Operating Temperature	32°F to 120°F (0°C to 49°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Maximum Humidity	95% relative (non-condensing)
Dimensions (LxWxD)	5.5 x 3.6 x 1.1 in. (140 x 92 x 28mm)

Ordering Information

60-924-3-C4TS	Concord 4 TouchScreen Keypad
---------------	------------------------------

Dimensional Diagrams

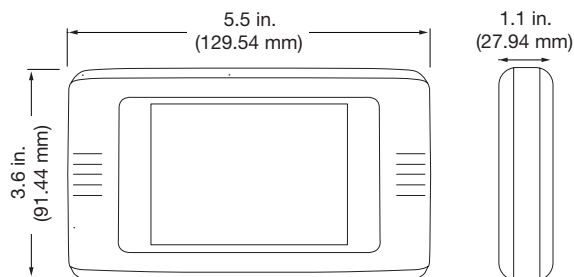

interlogix.com

Specifications subject to change without notice.

© 2016 United Technologies Corporation. All rights reserved.
All trademarks are the property of their respective owners.
Interlogix is part of UTC Climate, Controls & Security, a unit of
United Technologies Corporation.

601-3982 2016/01 (83461)