

Specifications

MPI-36


Self-Contained Siren Speaker

APPLICATION

The MPI-36 Self-Contained Siren Speaker combination is now available in an attractive new grill design housing. It contains a heavy-duty mylar diaphragm speaker with a dependable 2-channel siren driver. Perfect for indoor installation.

SPECIFICATIONS

- Output At 10 Feet:
 - (1) 6 Volts - 98 dB
 - (2) 12 Volts - 101 dB
- Temperature Range: +50 to -30 Degrees Centigrade.
- Frequency Range: 700 to 2000 Hz.
- Dimensions: 4.125" x 6.625" x 1.75".
- Strong Mylar Diaphragm Speaker.
- Weather Resistant.
- Construction: High Impact Bone White Plastic.
- Two Separate Sounds.
- Current Drain:
 - (1) 6 Volts - .125 AMP (Steady)
 - (2) 12 Volts - .350 AMP (Steady)

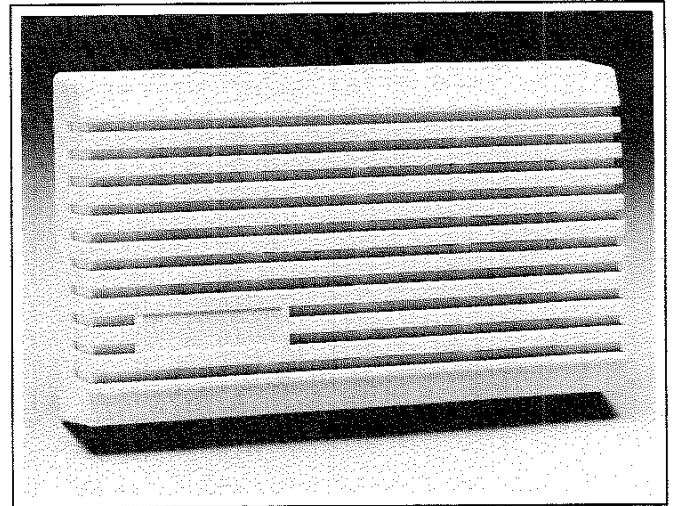

FEATURES

- Yelp and Steady Sounds.
- Heavy Duty Speaker Magnet.
- High Impact Plastic Enclosure.
- Super Fast Mounting.
- Quality Tested Siren Driver Circuit.
- Attractively Priced.

P.O. Box 2904
1510 Tate Boulevard S.E.
Hickory, NC 28603-2904
(704) 322-2333 (800) 800-2626
67248313

MOOSE

A Product of Sentrol, Inc.