



# SENTROL

## 1138T Series Surface Mount Terminal

|                     |                    |                |
|---------------------|--------------------|----------------|
| <b>Gap distance</b> | <b>Closed loop</b> |                |
| 1"                  | 1138T              |                |
| <b>Color</b>        | White              | Mahogany brown |
| <b>Quantity</b>     | 10                 |                |



1138T-N


**100% TESTED**



## 1138T Series Magnetic Contacts Surface Mount Terminal

### Installation Instructions

- Step 1: Run the system wiring to the switch location.
- Step 2: Align and mount the switch and the magnet with either the tape or screws provided. Orient as shown in the drawing below.
- Step 3: Insert wires through the wire lead entrances into the screw terminals. Tighten the screws.

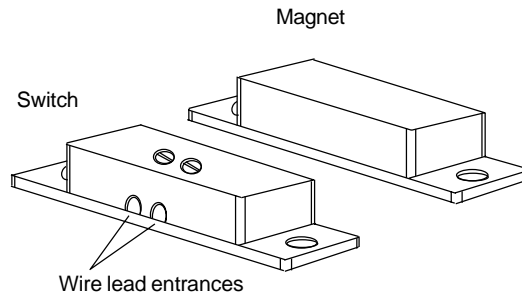

### Specifications

| Part Number | Loop Type | Electrical Configuration | Gap Distance                                  |
|-------------|-----------|--------------------------|---|
| 1138T       | Closed    | NO                       | Nominal 1"<br>Min Make 0.8"<br>Max Break 2.2" |

FORM A 1138T  
Voltage: 30VAC/DC MAX  
Current: 0.5A MAX  
Power: 7.5W MAX  
Use only wire sizes 18-22 gauge



PH 503.692.4052  
USA & Canada: 800.547.2556  
Technical Service: 800.648.7424 FaxBack: 800.483.2495  
www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.  
Interlogix, Caddx, ESL, ITI and Sentrol are  
trademarks of Interlogix, Inc.  
All other trademarks are properties of their

1035748 REV B 09/01