


Concord® 5" TouchScreen

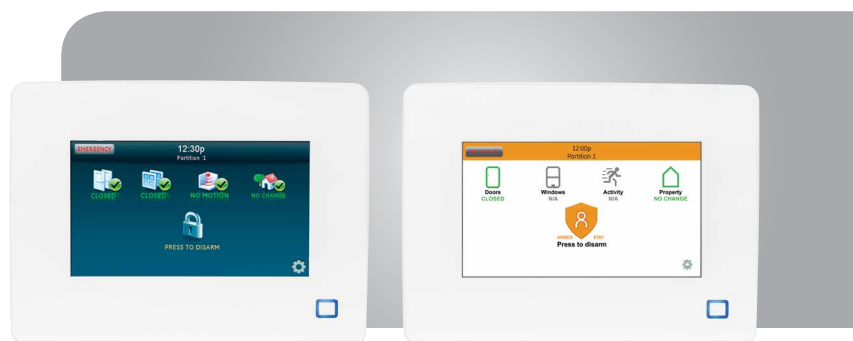

Classic interface

Alarm.com interface

OVERVIEW

The Concord 5" TouchScreen from Interlogix is a full-color, full-control LCD screen that complements Concord security systems for additional safety and peace of mind. The easy-to-use touch screen provides system owners with at-a-glance home status information, letting them easily and conveniently control their Concord system.

Multiple 5" TouchScreens may be used on a Concord system, making it an ideal way to add several points of control throughout a home or business. The exact number of touch screens that can be added is dependent on the power requirements of other devices that are configured on the system.


Power to the touch screen is provided by the panel, and backed up by the panel battery. An integrated speaker provides chime and siren sounds, notifying system owners of trouble and alarm conditions. Both wall plate and table top stands are included to accommodate wall mounting or table top installations.

Note: The Concord 5" TouchScreen supports comprehensive system programming and is compatible with Concord 4 versions 4.5 and above (**except version 4.82**).

STANDARD FEATURES


- 5-inch color LCD screen that delivers at-a-glance status of the system and property
- Selectable user interface (UI) which matches corresponding mobile app
- Notification status icons
 - Identify door/window open
 - Last motion detected
- At-a-glance status icon covers
 - Doors
 - Windows
 - Motion
 - Property (non-doors, windows and motion)
- At-a-glance state synchronized across multiple touch screens
- Support for multi-partition control, arming and status
- Complete installer system programming
- Connection to the Concord Superbus using four wires for data and power
- Multiple touch screens support on a single installation (additional power module may be added in order to support additional touch screens)

Concord® 5" TouchScreen

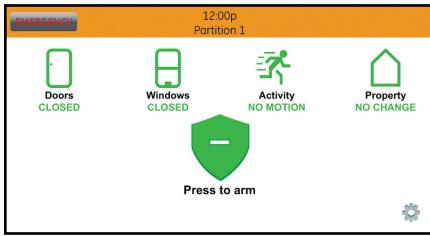

Main Screen

Quick, at-a-glance status provides a complete view of the system.

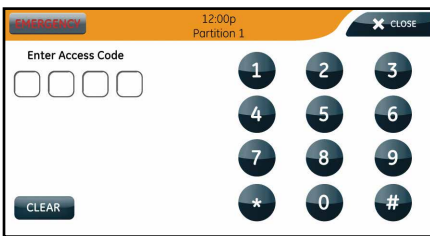


Code Entry Screen

Large keypad makes security system operation user friendly.



Settings

Multiple setting options allow for end user personalization of their system.

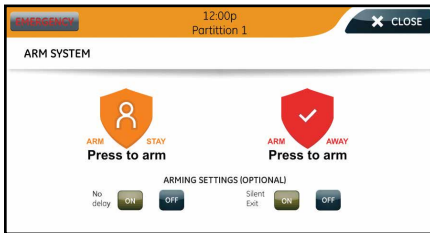

Arm Screen

One-touch arm/disarm functionality provides convenience and peace of mind.

Specifications

Compatibility	Concord 4, version 4.5 or later (except version 4.82)
Voltage	12 VDC nominal
Current	100mA typical, 400mA max alarm, 40mA power saving mode
Operating Temperature	32°F to 120°F (0°C to 49°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Maximum Humidity	85% relative (non-condensing)
Dimensions (LxWxD)	6.7 x 5.0 x 0.8 in. (170 x 127 x 20mm)
Regulatory	UL 985, UL 1023, UL 1610, ULC C1023, ULC S545

Ordering Information

60-924-3-C4TS5

Concord 5-inch TouchScreen



interlogix.com

Specifications subject to change without notice.

© 2019 United Technologies Corporation. All rights reserved.

All trademarks are the property of their respective owners.

Interlogix is part of UTC Climate, Controls & Security, a unit of

United Technologies Corporation.

2019/05 (GSP-2756)