

# TVD-SNB-BB Back Box Installation Instructions

## Description

Weight: 485 g (1.07 lb.)

Dimensions: 182 x 99.5 x 42 mm (7.1 x 3.9 x 1.6 in.)

Supported wall mounts: TVD-SNB, TVD-M2-WM

Figure 1: Dimensions of the back box


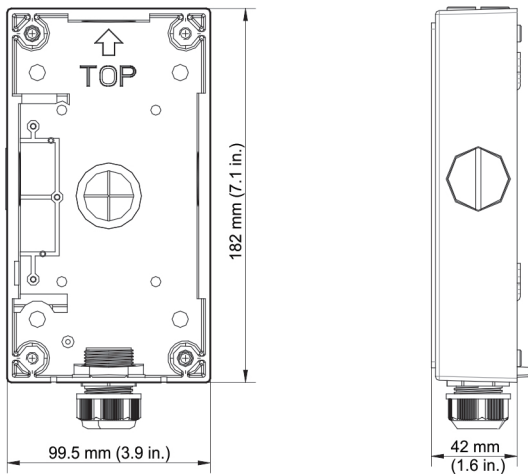



Figure 2: Top view




## Accessories

The back box is shipped with:


- Expansion screws (4 pieces)

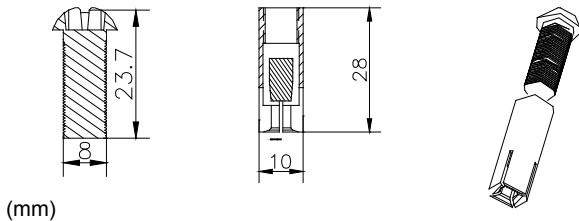

- HM 6 x 22 mm screws (4 pieces with flat and lock washers)




- G 3/4 (one pre-installed on the back box, two in the package box)




## Installation

- Mount the back box to the wall with the four expansion screws supplied.


A.

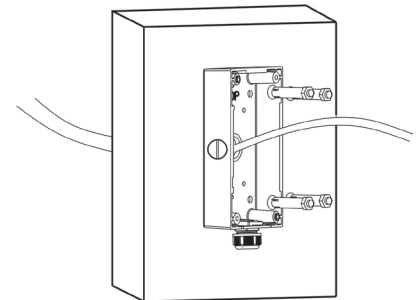

B.

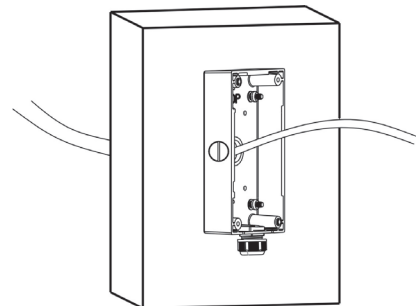

- Install the swan neck bracket to the back box using the four HM 6 x 22 mm screws and lock washers supplied.

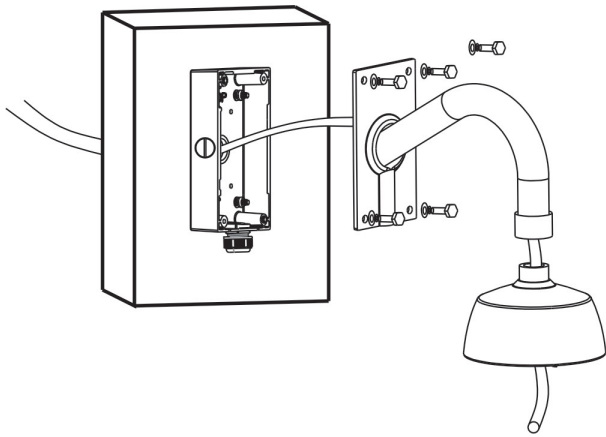

## Regulatory information

---

Manufacturer	Interlogix. 2955 Red Hill Avenue, Costa Mesa, CA 92626 5923, USA Authorized EU manufacturing representative: UTC Fire & Security B.V. Kelvinstraat 7, 6003 DH Weert, The Netherlands
--------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

Certification
---------------



---

Copyright	© 2016 United Technologies Corporation. Interlogix is part of UTC Climate, Controls & Security, a unit of United Technologies Corporation. All rights reserved.
-----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

Trademarks and patents	Trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.
------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------

---

## Contact information

For contact information, see [www.interlogix.com](http://www.interlogix.com) or  
[www.utcssecurityproducts.eu](http://www.utcssecurityproducts.eu).